


CoProcessor Modules

Basic CoProcessor Modules

F4-CP128-1 <--->

F4-CP128-T <--->

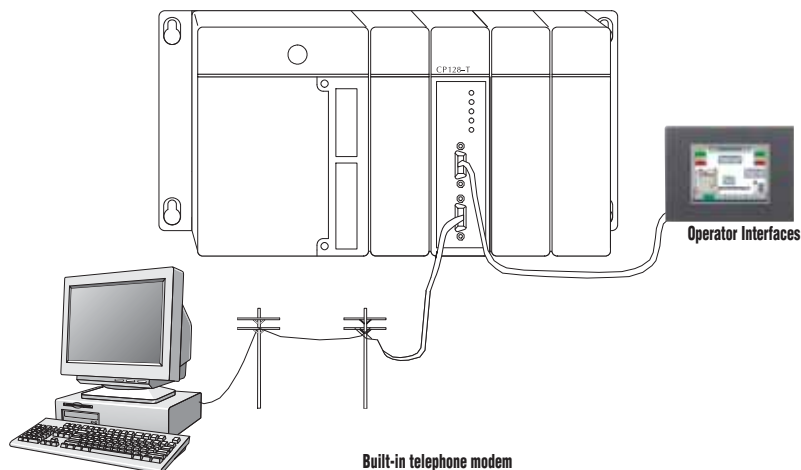

Overview

The FACTS CoProcessor Module interfaces the *Direct*LOGIC 405 family of programmable controllers with bar code readers, operator interface terminals, instrumentation equipment, computers, and other serial devices. The three ports offer a range of communication interfaces and baud rates. Please consult the port descriptions to see which module is best suited for your needs.

Features

- FACTS Extended BASIC and ABM Commander for Window software makes program development fast and simple. Allows ONLINE, full-screen BASIC program editing and the ability to save programs on disk (software on CD included with each module)
- Non-volatile memory of up to 128K bytes allows multiple program storage and execution, DL405 register expansion, and retentive data storage and retrieval
- 16 MHz or 26 MHz CoProcessor provides fast program execution independent of the DL405 CPU scan
- Three buffered ports permit communication from module to three or more external devices
- Programmable from either port for complete serial port utilization without having to switch cables
- A real-time clock/calendar maintains time/date with battery backup when power outages occur. Programmable time-based BASIC interrupts to .005 of a second
- Directly access up to 254 bytes of DL405 CPU memory per scan. No supporting ladder logic is required
- Floating point math solves complex formulas to eight significant digits
- Options include a built-in 300/1200/2400 baud telephone modem
- Includes Modbus master/slave BASIC examples and other application examples on CD

CoProcessor applications

The CoProcessors are designed for use with intelligent devices such as:

- Barcode readers
- Welders
- Board level controllers
- Serial printers
- Intelligent sensors
- Almost any device with an RS-232/422/485 port

CoProcessors are also good solutions for applications requiring large amounts of complex math.

CoProcessor Modules

Specifications	
Module Type	CoProcessor, intelligent
Modules per CPU	Eight maximum, any slot in CPU base
Communication	256 character type-ahead input buffer on all ports. Ports are independently programmed by software. Seven or eight data bits, 1 or 2 stop bits, even, odd or no parity. XON/XOFF software flow control and RTS/CTS handshake.
F4-CP128-1	128K bytes of battery-backed RAM. 26MHz clock rate. Runs BASIC programs two to three times faster than 16MHz CoProcessors. Port 1, RS232C/422/485 selectable, maximum baud rate of 115.2K baud. Port 2, RS232C/422/485 selectable, maximum baud rate 57.6K baud. Port 3, RS232C, maximum baud rate of 19.2K baud. Port 3 is available by using the RTS/CTS pins on Port 1. If you use these lines on Port 1, then Port 3 is not available.
F4-CP128-T	128K bytes of battery-backed RAM, 16 MHz clock rate. Port 1, RS232C/422/485 selectable, maximum baud rate of 57.6K baud. Port 2, RS232C, maximum baud rate 9600 baud. An optional use for port 2 is a built-in full-duplex, 300/1200/2400 baud PSK/FSK, asynchronous telephone modem. The modem is Bell 212A/103 & CCITT V.22/V.21 compatible. Automatic dialer with call progress monitoring detects no dial tone, ring and busy. Automatically answer calls. Can be used for remote data acquisition and diagnostics. Allows remote reprogramming of both BASIC CoProcessor and DirectLOGIC 405 CPUs. Exceeds FCC part 68 hazard protection requirements. Port 3, RS232C, maximum baud rate of 9600 baud. Port 3 is available by using the RTS/CTS pins on Port 1. If you use these lines on Port 1, then Port 3 is not available.
ABM Commander for Windows (CD-ROM included with module)	<p>Programming/documentation software for FACTS Engineering BASIC module. Key features include:</p> <ul style="list-style-type: none"> • Runs under Windows 95/98/2000 or Windows NT 3.51 or later. • Command Mode allows the user to program and debug with a "Point and Click" or Command Line Interface. • Uses standard Windows applications for off-line edited (Notepad) and terminal emulation (Hyperterminal) • Text Upload and Download BASIC programs • Binary Upload and Download BASIC programs • Extensive help file contains full user manual information • Includes Modbus master and Modbus slave BASIC programs and other application examples
Field Termination	9 pin D-sub connectors for port 1 and port 2. Port 3 uses electrical connections from port 1. (F4-CP128-T uses an RJ12 phone jack located under the module)
Power Consumption	F4-CP128-1 — 305mA maximum at 5VDC, (supplied by base power supply) F4-CP128-T — 350mA maximum at 5VDC, (supplied by base power supply)
Operating Environment	0°C-60°C (32°F-140°F), 5% to 95% humidity (non-condensing)
Manufacturer	FACTS Engineering

Field I/O

Software

C-more & other HMI

Drives

Soft Starters

Motors & Gearbox

Steppers/ Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Current Sensors

Pressure Sensors

Temperature Sensors

Pushbuttons/ Lights

Process

Relays/ Timers

Comm.

Terminal Blocks & Wiring

Power

Circuit Protection

Enclosures

Tools

Pneumatics

Safety

Appendix

Product Index

Part # Index

Check the Power Budget

Verify your power budget requirements

Your I/O configuration choice can be affected by the power requirements of the I/O modules you choose. When determining the types and quantity of I/O modules you will be using, it is important to remember there is a limited amount of power available from the power supply.

The chart on the opposite page indicates the power supplied and used by each DL405 device. The adjacent chart shows an example of how to calculate the power used by your particular system. These two charts should make it easy for you to determine if the devices you have chosen fit within the power budget of your system configuration.

If the I/O you have chosen exceeds the maximum power available from the power supply, you can resolve the problem by shifting some of the modules to an expansion base or remote I/O base (if you are using remote I/O).

Warning: It is extremely important to calculate the power budget correctly. If you exceed the power budget, the system may operate in an unpredictable manner which may result in a risk of personal injury or equipment damage.

Use ZIPLinks to reduce power requirements

If your application requires a lot of relay outputs, consider using the ZipLink AC or DC relay output modules. These modules can switch high current (10A) loads without putting a load on your base power budget. Refer to Wiring System for DL405 PLCs later in this section for more information.

This logo is placed next to I/O modules that are supported by the ZIPLink connection systems.

See the I/O module specifications at the end of this section.



Calculating your power usage

The following example shows how to calculate the power budget for the DL405 system. The example is constructed around a single 8-slot base using the devices shown. It is recommended you construct a similar table for each base in your system.

A			
<i>Base Number</i>	<i>Device Type</i>	<i>5 VDC (mA)</i>	<i>External 24 VDC Power (mA)</i>
0			
B CURRENT SUPPLIED			
<i>CPU/Expansion Unit /Remote Slave</i>	D4-440 CPU	3700	400
C CURRENT REQUIRED			
<i>SLOT 0</i>	D4-16ND2	+150	+0
<i>SLOT 1</i>	D4-16ND2	+150	+0
<i>SLOT 2</i>	F4-04DA	+120	+100
<i>SLOT 3</i>	D4-08ND3S	+100	+0
<i>SLOT 4</i>	D4-08ND3S	+100	+0
<i>SLOT 5</i>	D4-16TD2	+100	+0
<i>SLOT 6</i>	D4-16TD2	+100	+0
<i>SLOT 7</i>	D4-16TR	+1000	+0
D OTHER			
<i>BASE</i>	D4-08B	+80	+0
<i>Handheld Programmer</i>	D4-HPP	+320	+0
E Maximum Current Required		2820	100
F Remaining Current Available		3700-2820=880	400-100=300
1. Using a chart similar to the 3 one above, fill in column 2. 2. Using the tables on the opposite page, enter the current supplied and used by each device (columns 3 and 4). Pay special attention to the current supplied by the CPU, Expansion Unit, and Remote Slave since they differ. Devices which fall into the "Other" category (Row D) are devices such as the Base and the Handheld programmer, which also have power requirements, but do not plug directly into the base. 3. Add the current used by the system devices (columns 3 and 4) starting with Slot 0 and put the total in the row labeled "maximum current required" (Row E). 4. Subtract the row labeled "Maximum current required" (Row E), from the row labeled "Current Supplied" (Row B). Place the difference in the row labeled "Remaining Current Available" (Row F). 5. If "Maximum Current Required" is greater than "Current Supplied" in either column 3 or 4, the power budget will be exceeded. It will be unsafe to use this configuration and you will need to restructure your I/O configuration. Note the auxiliary 24 VDC power supply does not need to supply all the external power. If you need more than the 400mA supplied, you can add an external 24VDC power supply. This will help keep you within your power budget for external power.			

DL405 CPU power supply specifications and power requirements

Specification	AC Powered Units	24 VDC Powered Units	125 VDC Powered Units
Part Numbers	D4-450, D4-440, D4-430, D4-EX (expansion base unit), D4-RS (remote slave unit)	D4-450DC-1, D4-440DC-1, D4-EXDC (expansion base unit), D4-RSDC (remote slave unit)	D4-450DC-2, D4-440DC-2
Voltage Withstand (dielectric)	1 minute @ 1,500 VAC between primary, secondary, field ground, and run relay		
Insulation Resistance	> 10MΩ at 500VDC		
Input Voltage Range	85-132 VAC (110 range) 170-264 VAC (220 range)	20-28 VDC (24 VDC) with less than 10% ripple	90-146 VDC (125 VDC) with less than 10% ripple
Maximum Inrush Current	20 A	20 A	20 A
Maximum Power	50 VA	38 W	30 W

Power Requirements



Company Information

Systems Overview

Programmable Controllers

Field I/O

Software

C-more & other HMI

Drives

Soft Starters

Motors & Gearbox

Steppers/Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Current Sensors

Pressure Sensors

Temperature Sensors

Pushbuttons/Lights

Process

Relays/Timers

Comm.

Terminal Blocks & Wiring

Power

Circuit Protection

Enclosures

Tools

Pneumatics

Safety

Appendix

Product Index

Part # Index

Power Supplied																										
CPUs/Remote Units/Expansion Units	5 VDC Current Supplied in mA	24V Aux Power Supplied in mA	CPUs/Remote Units/Expansion Units	5V Current Supplied in mA	24VAux. Power Supplied in mA																					
D4-430 CPU	3700	400	D4-EX	4000	400																					
D4-440 CPU	3700	400	D4-EXDC	4000	NONE																					
D4-440DC-1 CPU	3700	NONE	D4-EXDC-2	3700	NONE																					
D4-440DC-2 CPU	3700	NONE	D4-RS	3700	400																					
D4-450 CPU	3100	400	D4-RSDC	3700	NONE																					
D4-450DC-1 CPU	3100	NONE	H4-EBC	3470	400																					
D4-450DC-2 CPU	3100	NONE	H4-EBC-F	3300	400																					
Power Consumed																										
Power-consuming Device	5V Current Consumed	External 24VDC Current Required	Power-consuming Device	5V Current Consumed	External 24VDC Current Required																					
I/O Bases			Analog Modules (continued)																							
D4-04B-1	80	NONE	F4-16AD-1	75	100																					
D4-06B-1	80	NONE	F4-16AD-2	75	100																					
D4-08B-1	80	NONE	F4-04DA-1	70	75+20per circuit																					
DC Input Modules			F4-04DA-2	90	90																					
			F4-04DAS-1	60	60 per circuit																					
			F4-04DAS-2	60	60 per circuit																					
			F4-08DA-1	90	100+20 per circuit																					
			F4-08DA-2	80	150																					
			F4-16DA-1	90	100+20 per circuit																					
			F4-16DA-2	80	25 max.																					
			F4-08RTD	80	NONE																					
			F4-08THM-n	120	50																					
			F4-08THM	110	60																					
AC Input Modules			Remote I/O																							
D4-08NA	100	NONE	H4-ERM	320	NONE																					
D4-16NA	150	NONE	H4-ERM-F	450	NONE																					
AC/DC Input Modules			D4-RM	300	NONE																					
D4-16NE3	150	NONE	Communications and Networking																							
F4-08NE3S	90	NONE	<table border="1"> <tr> <td>H4-ECOM100</td> <td>300</td> <td>NONE</td> </tr> <tr> <td>H4-ECOM-F</td> <td>670</td> <td>NONE</td> </tr> <tr> <td>D4-DCM</td> <td>500</td> <td>NONE</td> </tr> <tr> <td>F4-MAS-MB</td> <td>235</td> <td>NONE</td> </tr> <tr> <td>FA-UNICON</td> <td>NONE</td> <td>65</td> </tr> </table>			H4-ECOM100	300	NONE	H4-ECOM-F	670	NONE	D4-DCM	500	NONE	F4-MAS-MB	235	NONE	FA-UNICON	NONE	65						
H4-ECOM100	300	NONE																								
H4-ECOM-F	670	NONE																								
D4-DCM	500	NONE																								
F4-MAS-MB	235	NONE																								
FA-UNICON	NONE	65																								
DC Output Modules			CoProcessors																							
D4-08TD1	150	35	<table border="1"> <tr> <td>F4-CP128-1</td> <td>305</td> <td>NONE</td> </tr> </table>			F4-CP128-1	305	NONE																		
F4-CP128-1	305	NONE																								
F4-08TD1S	295	NONE																								
D4-16TD1	200	125	Specialty Modules																							
D4-16TD2	400	NONE	<table border="1"> <tr> <td>H4-CTRIO</td> <td>400</td> <td>NONE</td> </tr> <tr> <td>D4-INT</td> <td>100</td> <td>NONE</td> </tr> <tr> <td>D4-HSC</td> <td>300</td> <td>NONE</td> </tr> <tr> <td>F4-16PID</td> <td>160</td> <td>NONE</td> </tr> <tr> <td>F4-8MPI</td> <td>225</td> <td>170</td> </tr> <tr> <td>D4-16SIM</td> <td>150</td> <td>NONE</td> </tr> <tr> <td>F4-4LTC</td> <td>280</td> <td>75</td> </tr> </table>			H4-CTRIO	400	NONE	D4-INT	100	NONE	D4-HSC	300	NONE	F4-16PID	160	NONE	F4-8MPI	225	170	D4-16SIM	150	NONE	F4-4LTC	280	75
H4-CTRIO	400	NONE																								
D4-INT	100	NONE																								
D4-HSC	300	NONE																								
F4-16PID	160	NONE																								
F4-8MPI	225	170																								
D4-16SIM	150	NONE																								
F4-4LTC	280	75																								
D4-32TD1	250	140																								
D4-32TD1-1	250	140 (15V)																								
D4-32TD2	350	120 (4A max including loads)																								
D4-64TD1	800	NONE																								
AC Output Modules			Programming																							
D4-08TA	250	NONE	<table border="1"> <tr> <td>D4-HPP-1 (Handheld Prog.)</td> <td>320</td> <td>NONE</td> </tr> </table>			D4-HPP-1 (Handheld Prog.)	320	NONE																		
D4-HPP-1 (Handheld Prog.)	320	NONE																								
D4-16TA	450	NONE																								
Relay Output Modules			Operator Interface																							
D4-08TR	550	NONE	<table border="1"> <tr> <td>DV-1000</td> <td>150</td> <td>NONE</td> </tr> <tr> <td>C-more Micro-Graphic</td> <td>210</td> <td>NONE</td> </tr> </table>			DV-1000	150	NONE	C-more Micro-Graphic	210	NONE															
DV-1000	150	NONE																								
C-more Micro-Graphic	210	NONE																								
F4-08TRS-1	575	NONE																								
F4-08TRS	575	NONE																								
D4-16TR	1000	NONE																								
Analog Modules			Programming																							
F4-04AD	85	100	<table border="1"> <tr> <td>D4-HPP-1 (Handheld Prog.)</td> <td>320</td> <td>NONE</td> </tr> </table>			D4-HPP-1 (Handheld Prog.)	320	NONE																		
D4-HPP-1 (Handheld Prog.)	320	NONE																								
F4-04ADS	270	120																								
F4-08AD	75	90																								